

INSTALLATION MANUAL - SL HINGE


Tool Requirements		
Item	Tool Description	Qty.
1	Rivet Gun	1

IMPORTANT: If you are having difficulty with any part of the installation, please contact McLaren Doors technical support at 905-713-0772. For after-hours service, contact 416-316-6036.

A phone call can save you time and money!


1. Replace the damaged panel section with the SL-Hinge panel.
(Do **NOT** attach the aluminum hinge to the panel)

2. If removed, install the lower section of the door and secure the lower section in the horizontal tracks (Open position).

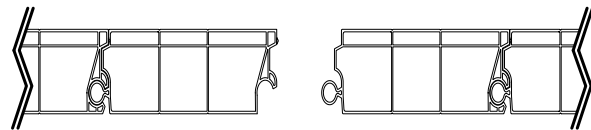


3. Install the upper section of the door in to the tracks and up against the lower section of the door.

(Make sure the SL-Hinge panel is the lowest panel of the section)

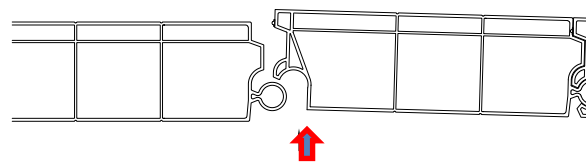

4. Roll the door to the lower section and lift the SL-Hinge panel over the male end of the lower door section.

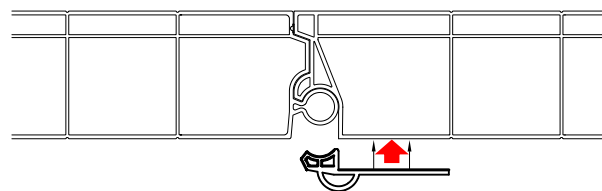

5. Starting from the center, attach the hinge using the 0.5" rivets provided.

